



## ANALYSIS OF UNINTENDED ELECTROMAGNETIC FIELDS GENERATED BY SAFETY SYSTEM CONTROL PANELS

Mirosław SIERGIEJCZYK, Adam ROSIŃSKI

Warsaw University of Technology, Faculty of Transport, [msi@wt.pw.edu.pl](mailto:msi@wt.pw.edu.pl), [adro@wt.pw.edu.pl](mailto:adro@wt.pw.edu.pl)

Jacek PAŚ

Military University of Technology, Faculty of Electronic, [jacek.pas@wat.edu.pl](mailto:jacek.pas@wat.edu.pl)

### Summary

Electronic devices, which are used in safety systems during operation, produce an unintended electromagnetic field. It can be a source of interference to other devices and systems used in the protected premises (the concept of internal and external compatibility). The value of the individual electromagnetic field components, which are produced by safety system control panels, depend on their operating state. Within the individual operating states, these devices consume different values of currents from basic or backup power supplies. The paper presents the research results of the unintended electromagnetic field generated by the safety system control panels. Measurements were carried out for two frequency ranges – a range of extremely low frequencies ELF (0÷2) kHz as well as a range of very low frequencies VLF (2÷100) kHz. The research was conducted according to the Polish standards on the measurement of electromagnetic fields in a range of low frequencies.

Keywords: operation, electromagnetic interference, control panels

### ANALIZA NIEZAMIERZONYCH PÓL ELEKTROMAGNETYCZNYCH WYTWARZANYCH PRZEZ CENTRALE ALARMOWE SYSTEMÓW BEZPIECZEŃSTWA

#### Streszczenie

Urządzenia elektroniczne stosowane w systemach bezpieczeństwa podczas pracy wytwarzają niezamierzone pole elektromagnetyczne. Może ono być źródłem zakłóceń dla innych urządzeń i systemów wykorzystywanych w ochronianych pomieszczeniach (pojęcie kompatybilności wewnętrznej i zewnętrznej). Wartość poszczególnych składowych pola elektromagnetycznego, które wytwarzają centrale alarmowe systemów bezpieczeństwa, zależą od ich stanu eksploatacyjnego. W poszczególnych stanach eksploatacyjnych urządzenia te pobierają różne wartości prądów z zasilacza podstawowego lub rezerwowego. W artykule przedstawiono wyniki badań niezamierzonego pola elektromagnetycznego generowanego przez centrale alarmowe systemów bezpieczeństwa. Pomiary przeprowadzono dla dwóch zakresów częstotliwości - zakres ekstremalnie małych częstotliwości ELF (0÷2) kHz oraz zakres bardzo małych częstotliwości VLF (2÷100) kHz. Badania zostały przeprowadzone zgodnie z polskimi normami dotyczącymi pomiaru pól elektromagnetycznych w zakresie małych częstotliwości.

Słowa kluczowe: eksploatacja, zakłócenia elektromagnetyczne, centrale alarmowe

## 1. INTRODUCTION

The proper operation of electronic devices or equipment fitted with electronic circuits is possible by protecting them against the adverse electromagnetic fields effects [2]. At present, all kinds of structures designed to operate in peace conditions and hazardous states are equipped with electrical systems, as well as numerous electrical and electronic devices, including electronic safety systems [12]. On the basis of numerous observations, it is possible to conclude that artificially created electric and magnetic fields of different frequency ranges may adversely affect the electronic devices' operation [5,13]. It was found that the devices and electronic systems operation may be seriously interfered due to the adverse electromagnetic fields effects [19]. The group

particularly susceptible to interference includes: measuring instruments, medical diagnostic devices, heart assist devices, hearing aids, computer systems [4,10], all types of devices containing electronic circuits with high input resistance elements [9]. Therefore, the issues related to the analysis of the electromagnetic fields, which are generated by the safety system control panels, are so important [11]. The paper presents the research results of the unintended electromagnetic field generated by the safety system control panels. Measurements were carried out for two frequency ranges – a range of extremely low frequencies ELF (0÷2) kHz as well as a range of very low frequencies VLF (2÷100) kHz. The research was conducted according to the Polish standards on the measurement of electromagnetic fields in a range of low frequencies.

## 2. INTRUSION DETECTION SYSTEM

The Intrusion Detection System (IDS) is designed to collect information from detectors, process them and signal the state of danger to property and people. European standard EN 50131-1:2006 "Alarm systems – Intrusion and hold-up systems – Part 1: System requirements", which at the same time has the status of the Polish standard PN-EN 50131-1:2009 "Alarm systems – Intrusion and hold-up systems – System requirements", contains a list of components (elements), which should be included in the Intrusion Detection System (IDS) [20]:

- control panel,
- one or more detectors,
- one or more signalling devices and/or alarm transmission systems,
- basic power supply,
- backup power supply.

The connections between the system elements should meet specific requirements included in the standards, and at the same time, they must be also included within the manufacturer's acceptable parameters. Generally, they can be divided into wired or wireless connections. Each of these solutions is characterised by specific values of the electromagnetic fields, which are produced by these devices.

The control panel is the most important part of the alarm system. Many electronic circuits, the role of which is to process signals received from individual devices, are used within the control panel. The information on the state of individual input lines (e.g. detectors), and output lines (e.g. signalling devices), as well as the data entered by a user or a maintenance engineer (e.g. with the use of the keypad), are also sent to the above-mentioned control panel. Depending on the control panel type, information can be sent directly to the control panel motherboard or to the modules implementing specific functions (e.g. input expansion, output expansion, printers interfaces, etc.).

Microprocessor-based digital panels with basic and backup power supply are currently the most commonly used in transport facilities [16,21]. In small facilities, the intrusion detection system may have a uniform structure, i.e. the one in which it is necessary to connect all detection circuits and output lines (signalling and controlling ones) directly to the control panel motherboard. It was shown in Fig. 1.

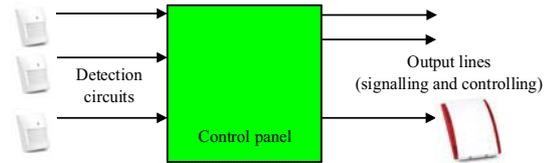


Fig. 1. Intrusion Detection System of the uniform structure

The electronic devices applied in transport are required to meet multiple criteria. They include, among others, miniaturization, electricity consumption reduction, high functionality [6,14,24], high reliability [7,17,22], possibility to diagnose [3,8,23] individual operating states [15,18], and vibration resistance [1]. The implementation of these requirements results in the fact that a level of useful device signals can be compared to a level of interference generated e.g. by static and mobile interference sources (e.g. medium- and high-voltage lines, transformer stations, electrical devices). Therefore, the issue of measuring the electric field strength values and magnetic field induction for the implemented or used safety systems becomes relevant.

## 3. THE STUDY OF THE ELECTROMAGNETIC FIELD GENERATED BY SAFETY SYSTEM CONTROL PANELS

The control panel is the most crucial electronic device in the safety system. Its role is to receive signals from detectors and then to produce an alarm signal (according to pre-programmed configuration). Currently, most of the control panels are built with the use of digital systems – microprocessors. They implement the individual alarm system functions (e.g. alarming, blocking, notification, etc.). In Fig. 2, the graph of the B induction and components ( $B_x$ ,  $B_y$ ,  $B_z$ ) of the magnetic field in a range of ELF frequencies for the Galaxy 520 control panel at a distance of 5 and 35 cm from the interference source, were presented. The B induction of the magnetic field has large values at a distance of 5 cm – B induction of the magnetic field amounts to 28 [mT]. However, at a distance of 35 cm, the field value is 9.1 [mT]. Therefore, the electronic devices susceptible to the electromagnetic field impact (e.g. computer monitor, surveillance system) should not be installed near the control panel (at a distance of less than 50 cm – Fig. 3).

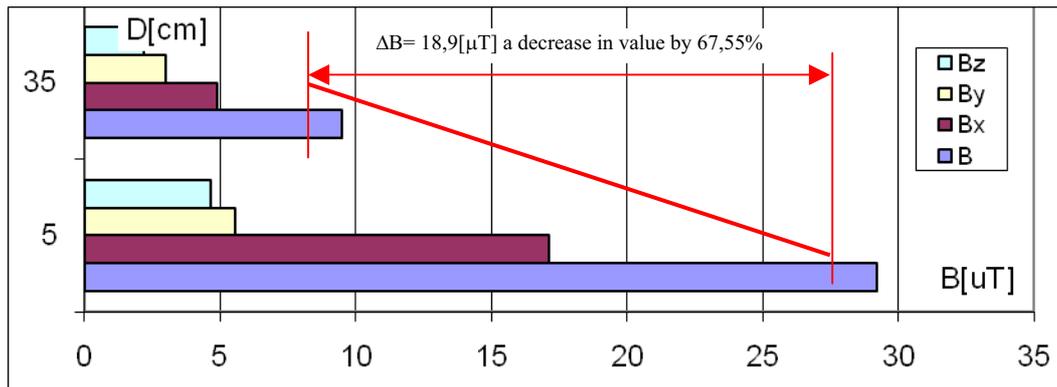


Fig. 2. The B induction graph of the magnetic field in the ELF frequency range for the Galaxy 520 control panel at a distance of 5 and 35 cm

The B induction value of the magnetic field was diverse in different measuring points, which were located near the control panel metal housing. The B induction changes graph of the magnetic field as the distance function from the measuring point for the maximum induction values was presented in Fig. 3. At a distance of 50 cm from the control panel metal housing, which also fulfils a role of the screen and tamper-resistant function, the B induction value was 1.7[mT]. Above 75 cm from the housing, the B induction value reached a level of the electromagnetic field background, which was in the examined facility i.e. B [0.09 ÷ max 0.12] mT. The B induction value of the magnetic field in the VLF frequency range was at a very low level and was included within the range from 0.02 – to max. 0.05 nT. Such a small B induction level value of the magnetic field of this frequency range shows the S high damping coefficient provided by the control

panel metal housing. Electromagnetic interference of this frequency range are perfectly damped by the metal housing. The B induction value of the magnetic field in the ELF frequency range for the Satel CA 64 control panel are lower, and at the level of 22.3 [mT]. The decrease in the B induction of the magnetic field of this frequency range (marked in Fig. 2, 4) respectively amounts to 67.55% for the Galaxy control panel, and 53.8% for the Satel CA 64 control panel. The B induction of the magnetic field is shielded by the control panel metal housing, where, in addition to the control panel electronic components, the main power supply of the electronic safety system was placed. The B induction of the magnetic field, which was in the facility (another safety system) in the VLF frequency range, was also at a very low level and was respectively from 0.01 – to max. 0.03 nT.

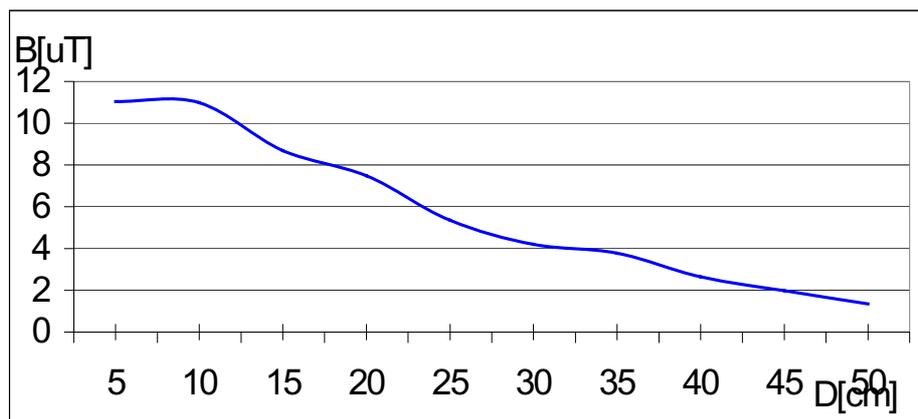


Fig. 3. The B induction change of the magnetic field in the ELF frequency range within the distance function from the measuring point for the Galaxy 520 control panel

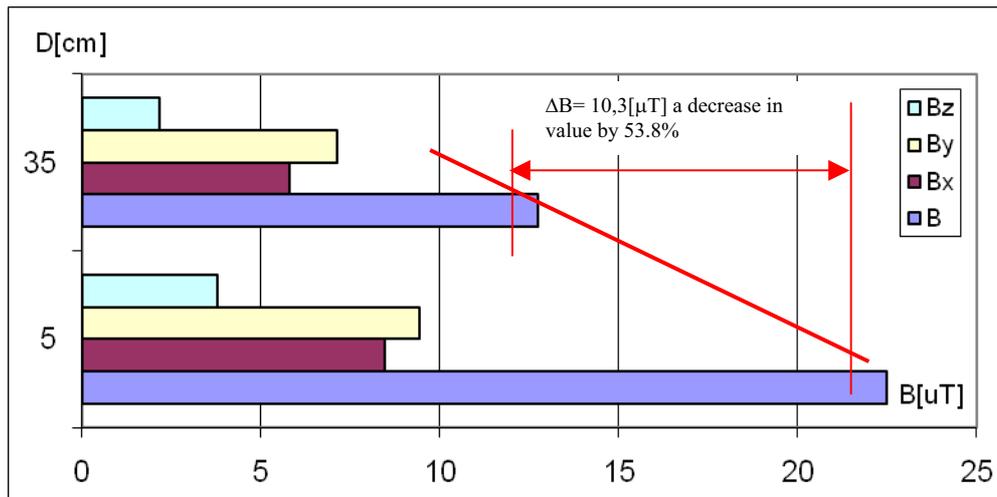


Fig. 4. The B induction graph of the magnetic field in the ELF frequency range for the Satel CA 64 control panel at a distance of 5 and 35 cm

The E electric field strength near the control panel metal housing was at a high level – at a distance of 5 cm respectively 63 [V/m] for the Galaxy control panel and 43 [V/m] for the Satel control panel. At a distance of 40 cm from the control panel housing, the E electric field strength in

the ELF frequency range was at a level of the field background, which was in both protected facilities ~ (13 – 7) [V/m] – Fig. 5. The electric field of this frequency range is very well-damped (shielded) by the control panel metal housing.

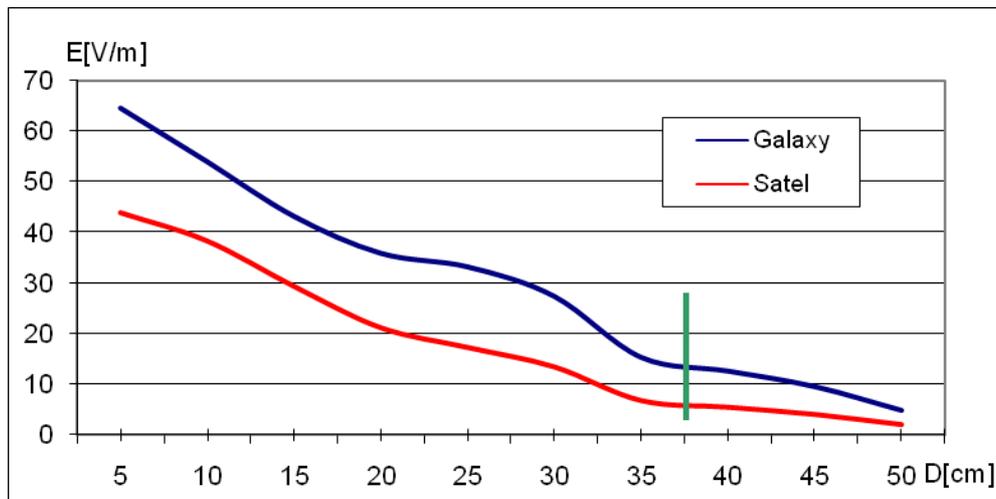


Fig. 5. The E electric field strength measurement results in the ELF frequency range for the Galaxy 520 and the Satel CA 64 control panels

#### 4. SUMMARY AND CONCLUSIONS

The values of individual components of the electromagnetic field, i.e. the B induction magnetic component as well as the E electric field strength are different for the individual safety system control panels. These are the electronic safety system devices, which generate one of the highest unintended levels of electromagnetic radiation. The B induction of the magnetic field as well as its components ( $B_x$ ,  $B_y$ ,  $B_z$ ) in the ELF frequency range for the Galaxy 520 and CA 64 control panels reaches great values at a distance of 5 cm from the

metal housing. However, at a distance of 35 cm from the interference source, the B induction value of the magnetic field is 9.1 [mT]. Therefore, the electronic devices susceptible to the electromagnetic field impact should not be installed near the control panel (below 75 cm). It is certainly possible to use various types of solutions, the aim of which is to minimise the electromagnetic interference impact (the source of which are control panels) on other electronic devices operating nearby. One of the methods is to minimise the transfer of interference by the feedback circuit (e.g. decoupling filters, groundings, gate drives,

shielding, etc.). At the same time, external interference sources should not affect the operating control panels. The control panels should also not be a source of interference (a concept of external and internal electromagnetic compatibility).

## BIBLIOGRAPHY

- Burdzik R., Konieczny Ł., Figlus T. Concept of on-board comfort vibration monitoring system for vehicles. In: J. Mikulski (Ed.): *Activities of Transport Telematics*, TST 2013, CCIS 395. Springer, Heidelberg 2013. pp. 418-425.
- Charoy A. Interference in electronic equipment. WNT, Warsaw 1999.
- Dabrowski, T., Bednarek, M., Fokow, K., Wisnios, M. The method of threshold-comparative diagnosing insensitive on disturbances of diagnostic signals. *Przegląd Elektrotechniczny - Electrical Review*, vol. 88, issue 11A, 2012: 93-97.
- Duer S., Zajkowski K., Duer R., Paś J. Designing of an effective structure of system for the maintenance of a technical object with the using information from an artificial neural network. *Neural Computing & Applications* 2012. DOI: 10.1007/s00521-012-1016-0.
- Dyduch J., Paś J., Rosiński A. Basics of maintaining electronic transport systems. *Publishing House of Radom University of Technology*, Radom 2011.
- Kasprzyk Z., Rychlicki M. Analysis of physical layer model of WLAN 802.11g data transmission protocol in wireless networks used by telematic systems. In: „*Proceedings of the Ninth International Conference Dependability and Complex Systems DepCoS-RELCOMEX*”, given as the monographic publishing series – „*Advances in intelligent systems and computing*”, Vol. 286. Springer, 2014: 265-274.
- Laskowski, D., Łubkowski, P., Pawlak, E., Stańczyk, P. Anthropotechnical systems reliability. In: the monograph „*Safety and Reliability: Methodology and Applications - Proceedings of the European Safety and Reliability Conference ESREL 2014*”, editors: Nowakowski T., Młyńczak M., Jodejko-Pietruczuk A. & Werbińska-Wojciechowska S. CRC Press/Balkema, London 2015: 399-407.
- Niziński, S., Wierzbicki S. Integrated it system for vehicle control. *Diagnostyka*, 2004 30: 47-52.
- Ott H. W. Methods of reducing interference and noise in electronic systems. WNT, Warsaw 1979.
- Paś J., Duer S. Determination of the impact indicators of electromagnetic interferences on computer information systems. *Neural Computing & Applications* 2012. DOI:10.1007/s00521-012-1165-1.
- Paś J., Dyduch J. Impact of electromagnetic interference on transport security systems. *Measurements Automatics Robotics*, no 10/2009.
- Paś J. Analysis of exploitation access control system selected object. *Przegląd elektrotechniczny*, vol 2015, no 10, r. 91: 219-224
- Paś J. Operation of electronic transportation systems. *Publishing House University of Technology and Humanities*, Radom 2015.
- Perlicki K. Impact of an alien wavelength on wavelength division multiplexing transmission quality. *Photonics Letters of Poland*, vol. 4, no. 3, 2012: 118-120.
- Rosiński A. Modelling the maintenance process of transport telematics systems. *Publishing House Warsaw University of Technology*, Warsaw 2015.
- Rosiński A. Reliability-exploitation analysis of power supply in transport telematics system. In: „*Safety and Reliability: Methodology and Applications - Proceedings of the European Safety and Reliability Conference ESREL 2014*”, editors: Nowakowski T., Młyńczak M., Jodejko-Pietruczuk A., Werbińska-Wojciechowska S. CRC Press/Balkema, 2015: 343-347.
- Siergiejczyk M., Krzykowska K., Rosiński A. Reliability assessment of cooperation and replacement of surveillance systems in air traffic. In: „*Proceedings of the Ninth International Conference Dependability and Complex Systems DepCoS-RELCOMEX*”, editors: Wojciech Zamojski, Jacek Mazurkiewicz, Jarosław Sugier, Tomasz Walkowiak, Janusz Kacprzyk, given as the monographic publishing series – „*Advances in intelligent systems and computing*”, Vol. 286, Springer 2014: 403-411.
- Siergiejczyk M., Paś J., Rosiński A. Evaluation of safety of highway CCTV system's maintenance process. The monograph „*Telematics – support for transport*”, editors: Jerzy Mikulski, given as the monographic publishing series – „*Communications in Computer and Information Science*”, Vol. 471. Springer-Verlag, Berlin Heidelberg 2014: 69-79.
- Siergiejczyk M., Paś J., Rosiński A. Train call recorder and electromagnetic interference. *Diagnostyka*, vol. 16, no. 1 (2015): 19-22.
- Siergiejczyk M., Rosinski A. Reliability analysis of electronic protection systems using optical links. In: W. Zamojski & J. Kacprzyk & J. Mazurkiewicz & J. Sugier & T. Walkowiak (eds) *Dependable Computer Systems*: 193-203, given as the monographic publishing series – „*Advances in intelligent and soft computing*”, Vol. 97. Springer-Verlag, Berlin Heidelberg 2011.
- Siergiejczyk M., Rosinski A. Reliability analysis of power supply systems for devices used in transport telematic systems. In: J. Mikulski (eds) *Modern Transport Telematics*, given as the monographic publishing series – „*Communications in Computer and Information Science*”, Vol. 239. Springer-Verlag, Berlin Heidelberg 2011: 314-319.
- Siergiejczyk M., Rosiński A., Krzykowska K. Reliability assessment of supporting satellite system EGNOS. In: W. Zamojski, J. Mazurkiewicz, J. Sugier, T. Walkowiak, J. Kacprzyk (eds) *New results in dependability and computer systems*, given as the monographic publishing series – „*Advances in intelligent and soft computing*”, Vol. 224. Springer 2013: 353-364.
- Stawowy M. Model for information quality determination of teleinformation systems of transport. In: “*Proceedings of the European Safety and Reliability Conference ESREL 2014*”, editors: Nowakowski T., Młyńczak M., Jodejko-Pietruczuk A. & Werbińska-Wojciechowska S. CRC Press/Balkema 2015: 1909-1914.
- Sumila M. Selected aspects of message transmission management in ITS systems. In: the monograph „*Telematics in the transport environment*”, editors: Jerzy Mikulski, given as the monographic

publishing series – „Communications in Computer and Information Science”, Vol. 329. Springer-Verlag, Berlin Heidelberg 2012: 141-147.

---

Received 2016-03-21

Accepted 2016.06.27

Available online 2016-09-19



**Prof. Mirosław**

**SIERGIEJCZYK**, Ph.D. Eng.

- scientific fields of interest of the paper co-author concern among other issues of architecture and services provided by telecommunications networks and systems, especially from perspective of their applications in transport, reliability and operation of telecommunications networks and systems, modelling, designing and organising telecommunications systems for transport.



**Jacek PAŚ** Ph.D. Eng. -

scientific interests (electromagnetic compatibility, analog circuits, reliability, low frequency noise, exploitation, diagnostics, projecting) are problems connected with comprehended wide electronic systems of the safety both for stationary as well as for movable objects.



**Adam ROSIŃSKI** Ph.D.

Eng. - scientific interests (reliability, exploitation, diagnostics, projecting) are problems connected with comprehended wide electronic systems of the safety both for stationary as well as for movable objects.